

EX-Series DVR



CE FC U

WatchNET

Integrated Digital Technologies



EX-12004RTSH-KIT / EX-24008RTSH-KIT / EX-48016RTSH-KIT



Embedded DVR Main Features:

- ❖ Industrial Hi performance DVR with HDMI output and eSATA Port
- ❖ Enhanced H.264 compression algorithm save HDD space & low bandwidth
- ❖ 400/480 fps D1 (4CIF) Real time recording 16 Channels
- ❖ Video Output - 1x composite video, 1x VGA, 1x HDMI
- ❖ Multiple control methods: Front panel, IR remote controller, keyboard, USB mouse and network keyboard
- ❖ Dual encoding streams support, flexible for network transmission and mobile phone monitoring
- ❖ Variable frame recording on event with Hi Resolution switching
- ❖ Alarm triggering, OSD, siren, PTZ preset, e-mail, FTP upload
- ❖ Pentaplex function: live, recording, playback, backup & remote access
- ❖ 4, 8 and 16 Channel simultaneous playback
- ❖ Networking access for remote live viewing, recording, playback, setting, system status, event log
- ❖ Smart video motion detection, camera mask, video loss
- ❖ Smart camera settings: privacy masking, camera lock, color setting, and title display, virtual fence, smart motion search
- ❖ PTZ cameras up to 60 protocols supported
- ❖ 3D mouse control for PTZ cameras
- ❖ Powerful 64 channel network software: built-in web server, multi-DVR client, mobile surveillance software for smart phone & CMS

HDMI®

HIGH-DEFINITION MULTIMEDIA INTERFACE

eSATA PORT



64 Channel NVR Client
with IP & Megapixel camera integration included

www.watchnetdvr.com

Division of
Videon
Integrated Digital Technologies Ltd.




Embedded DVR Technical Specifications

Model	EX-12004RTSH-KIT	EX-24008RTSH-KIT	EX-48016RTSH-KIT
System			
Main Processor	High performance embedded micro processor		
Operating System	Embedded LINUX		
System Resources	Pentaplex function: live, recording, playback, backup & remote access		
User Interface	GUI, on-screen menu tips, Grid search		
Control Device	Front panel, USB mouse, keyboard, IR remote control, network keyboard		
Input Method	Alpha numeric / Denotation		
System Status	HDD status, data stream statistics, log record, bios version, on-line user etc.		
Password Protection	YES		
Video			
Video Input	4 channel, BNC, 1.0Vp-p, 75Ω, looping	8 channel, BNC, 1.0Vp-p, 75Ω, looping	16 channel, BNC, 1.0Vp-p, 75Ω, looping
Video Output	1 channel TV output, BNC, 1.0Vp- p, 75Ω, 1 VGA output, 1 HDMI output, 1 Matrix output		
Video Standards	PAL(625Line, 50f/s), NTSC(525Line, 60f/s)		
Video Compression	Format	NTSC	PAL
	D1(4CIF)	704 X 480	704 X 576
	CIF	352 X 240	352 X 288
	2CIF	704 X 480	704 X 288
Video Recording	QCIF	176 X 120	176 X 144
	CIF/QCIF: PAL 1f/s~25f/s, NTSC 1f/s~30f/s		
	2CIF: PAL 1f/s-25f/s NTSC 1f/s-30f/s		
	4CIF: PAL 1f/s-25f/s NTSC 1f/s-30f/s		
Dual video encoding streams supported			
D1@30fps on all channels			
Video Display Split	1 and 4 view	1, 4, 8 and 9 view	1, 4, 8, 9, and 16 view
Sequential Display	Supported		
Image Quality	1~6 level (level 6 is the best)		
Privacy Masking	4 self-defined four-sided zones for privacy masking for each camera		
Covert Camera	Hide camera from viewing		
Camera Adjustment	2 Color Schedule time period day/night		
Video Information	Camera title, time, video loss, camera lock, motion detection, recording		
TV Output Adjustment	Adjust TV output color & display zone		
Audio			
Audio Input	4 channel, BNC, 200-2800mV, 30KΩ	8 channel, BNC, 200-2800mV, 30KΩ	16 channel, BNC, 200-2800mV, 30KΩ
Bidirectional Talk Input	1 channel, BNC, 200-2800mV, 30KΩ, same with the 1 st channel		
Audio Output	1 channel, BNC, 200-3000mv, 5KΩ		
Audio Compression	Enhanced G.711Compression		
Video Detection & Alarm			
Motion Detection	Micro Grid and 396 (22*18) detection zones Sensitivity: 1-6 (level 6 is highest) Record, preset, PTZ, alarm, pop-up, email, FTP		
Video Loss/Camera Mask	Trigger recording, PTZ movement, tour, alarm, email		
Alarm Input	4 channel, programmable, ground, manual open/closed Trigger recording, PTZ movement tour, alarm, email	8 channel, programmable, ground, manual open/closed Trigger recording, PTZ movement tour, alarm, email	16 channel, programmable, ground, manual open/closed Trigger recording, PTZ movement tour, alarm, email
Relay output	6 channel, 30VDC, 1A, NO/NC, form-C		
Video Virtual Fence	Configurable 8 zone detection		
Hard Disk	8 SATA HDD up to 2TB	8 SATA HDD up to 2TB	8 SATA HDD up to 2TB
HDD Space	Audio: 14.4MB/H Video: 56 ~ 500MB/H		
HDD Management	HDD-fault, low disk space		
Auxiliary Interface			
USB Interface	2 ports, 1 for mouse control, 1 for backup		
RS232	Keyboard, PC communication		
RS485	PTZ control		


Model	EX-12004RTSH-KIT	EX-24008RTSH-KIT	EX-48016RTSH-KIT
Network			
Interface	RJ-45 Port (10/100M)		
Network Function	TCP/IP, UDP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Email, Alarm Server, RSTP, RTP		
Remote Operation	Monitor, PTZ control, playback, system setting, file download, log information		
Network transmission Speed	Real time display @CIF resolution		
Record, Playback & Backup			
Recording Mode	Manual, continuous, motion detection, camera mask, video loss, area detection, alarm input		
Recording Priority	Manual >Alarm >Video Detection >Continuous		
Recording Interval	1 to 120 minutes (default: 60 minutes), Pre-record up to 30 seconds, Post-record up to 5 minutes		
Overwrite Mode	Supported FIFO		
Micro Grid Search	Time/Date, Alarm, Motion Detection, area search, exact search (accurate to second)		
Playback	4, 8 and 16 channel playback simultaneously, pause, stop, rewind, fast play, slow play, next file, previous file, next camera, previous camera, full screen, repeat, shuffle, backup selection		
Digital Zoom	Selected zone can zoom into full screen during playback		
Backup Mode	Flash disk/ USB HDD/ USB CD/DVD-RW/ / Network download		
Environmental			
Power Supply	220V 50Hz / 110V 60Hz		
Power consumption	25W		
Working Temperature	-10° ~ +55°		
Working Humidity	10% ~ 90%		
Atmosphere Pressure	86kpa~106kpa		
Dimension	1U, 440mmx445mmx90mm (W*D*H)		
Weight	10KG(without HDD)		
Mounting	Desktop / Rack Mount		
Integration			
ATM	All major ATMs integrated through Network		
POS	Text Display & Alarm Search Supported		

All product specifications on this brochure are subject to change without notice.

Model Reference Chart

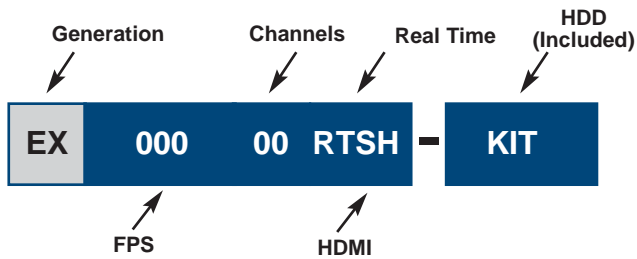

Connection Diagram

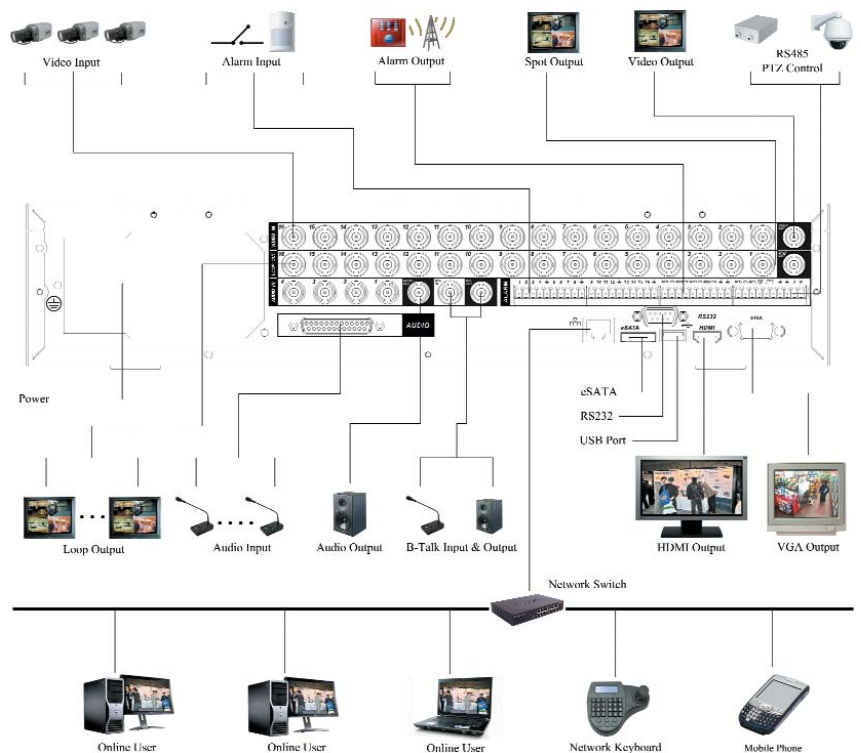



Embedded 8TB DVRs, CMS & PTZ
with Auto Trace Function & POS Integration



Real Time
Stand Alone ATM DVR



Mobile DVR with
Real time GPS Tracking/Viewing



Intelligent Motion Tracking



Megapixel NVR Hybrid
Scalable from 4 to 64 Channels



XDD
XTREME DIGITAL DYNAMICS

Ultra Hi Resolution Vandal Dome Camera

Canada
351 Ferrier Street, Unit 5
Markham, ON L3R 5Z2
Toll Free: 1-866-843-6865
Tel: 416-410-6865
Fax: 1-866-331-3341

USA
700 Ensminger Rd. Suite 104
Tonawanda, NY 14150 USA
Toll Free: 1-866-843-6865
Local: 1-717-687-8736
Fax: 1-866-331-3341

info@watchnetdvr.com
www.watchnetdvr.com

INDIA:
E-98, Ground Floor
Lajpat Nagar-I
New Delhi-110024
Toll: +91 11 29824005
Fax: +91 11 29824006

UAE:
P O Box No 8425
Dubai, UAE
Tel: +971 4 3584458
Fax: +971 4 3584458
Mobile : +971 50 5869290